



# MultiSupporter 4012 | Aquaculture Support




The MultiSupporter is based on years of operational experience within the maritime industry. The maximum free deck space combined with the versatile design, makes the vessel an all-round support vessel for aquaculture operations.




<b>CLASSIFICATION</b>	Bureau Veritas I ✘ HULL • MACH • AUT-UMS, Unrestricted Nav., Multi-Purpose / Special Service, GMDSS Area A2
<b>DIMENSIONS</b>	
LENGTH O.A.	40,30 meter
BREADTH MLD.	12,00 meters
DEPTH AT SIDE	3,50 meters
DRAFT	2,25 meters
<b>PERFORMANCES</b>	
SPEED	10.0 knots
BOLLARD PULL	12 tons
<b>PROPULSION</b>	
MAIN ENGINES	Azimuth L Drive 400 kW
MOTOR	Integrated PM e-motor
PROPELLERS	1130 mm diameter in nozzle
<b>AUXILIARIES</b>	
GENERATOR SETS	3x Scania D16 075M
GENERATOR POWER	3x 555 ekW, 60 Hz
BOW THRUSTER	Steering grit type 191 kW at 1800 rpm
HYDRAULIC POWERPACK	Electrical driven

<b>TANKS</b>	
FUEL OIL	86 m <sup>3</sup> (free from shell)
FRESH WATER	220 m <sup>3</sup> (including trimwater)
<b>DECK LAY-OUT</b>	
FREE DECK SPACE	170 m <sup>2</sup>
DECK CRANE	3 x Hydraulic knuckle boom type HS Marine AK 48/18.5 E5 9 ton @ 3,4 m 1,1 ton @ 18,5 m
CAPSTANS	2 x 5 ton, hydraulic driven
FENDERING	Fendering on the sides
<b>FISH RELATED EQUIPMENT</b>	
DE-LICE EQUIPMENT	Integrated 2-line Hydrolicer system
A-FRAME	removable type at the stern
HIGH PRESSURE WASHING SYSTEM	hot/cold water, 2 hoses on deck
<b>ACCOMMODATION</b>	
FACILITIES	Air-conditioned accommodation for 6 crew members.
<b>OPTIONAL ITEMS</b>	
MANOEUVRING	DP 1 system
GMDSS	A3
TOWING WINCH	30 tons
PROPULSION	IMO Tier III compliant
ENTERTAINMENT SYSTEM	TV and internet system

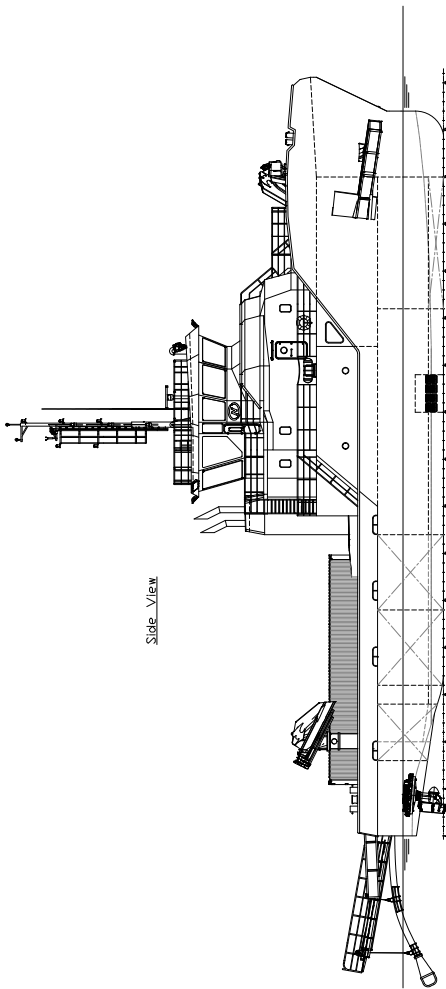


Side View


Main Deck

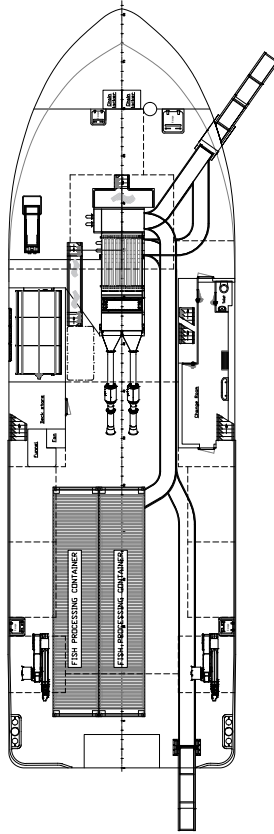

Bridge Deck

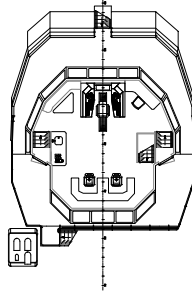


Below Main Deck

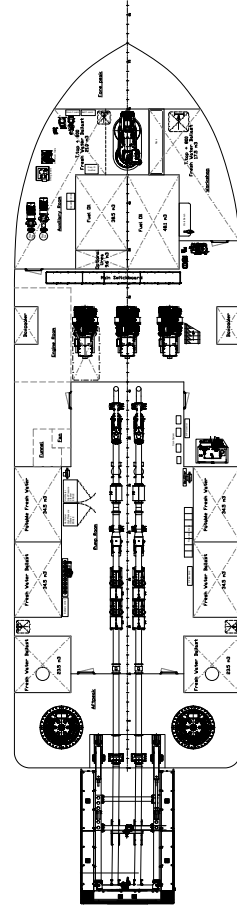

Intersection

Accommodation / Forecastle Deck

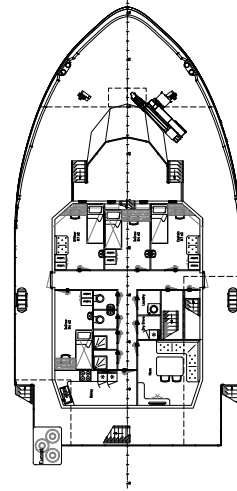

# MultiSupporter 4012 | Aquaculture Support